

Stay Ahead of the Flames
Hikvision Thermal Products



www.hikvision.com
support@hikvision.com



Stay Ahead of the Flames
Hikvision Thermal Products



ABOUT HIKVISION

Leading Provider of AIoT Products and Solutions

Hikvision is committed to serving various industries through its cutting-edge technologies of machine perception, artificial intelligence, and big data, leading the future of AIoT:



Through comprehensive machine perception technologies, we aim to help people better connect with the world around them.



With a wealth of intelligent products, we strive to identify diverse demands by delivering intelligence at your fingertips.



Through innovative AIoT applications, we are dedicated to empowering every individual to enjoy a better future by building an intelligent world that is more convenient, efficient and secure.

Dynamic Growth & Global Impact

Dynamic Growth

 **\$ 12.68 B** Total revenue in 2023

 **28%** Compound annual growth rate from 2010 to 2023

 **58,000+** Employees worldwide

*Based on the average exchange rate in 2023: USD 1 = RMB 7.0467

Business Scope

Core Business

Public Service Business	Smart city Urban governance	Intelligent traffic Public transport ...
	Retail Logistics Energy	Education Healthcare Manufacturing ...
SMB Business	One-stop solutions with intelligent products, covering video security, access control, intercom, alarms, etc.	

Global Coverage

**4**
Regions: Pan Asia Pacific, Pan Europe, Middle East and Africa, Americas

**18**
Regional logistics centers

**80**
Subsidiaries and branch offices outside the Chinese mainland

**400+**
After-sales service points

8 Innovative Businesses

Smart Home

Automotive Electronics

Robotics

Intelligent Storage

Fire Security

Infrared Sensing

X-Ray Detection

Medical Imaging

SMALL-AREA FIRE PREVENTION



Temperature Detection

Provides non-contact temperature measurement for fast and visible detection, so actions can be taken early enough to prevent a fire before the worst happens.



Light & Audio Warning

Detects threats in a timely manner and triggers a strobe light with customizable audio alarms.

HeatPro

MEDIUM-AREA FIRE PREVENTION



Forklift Filter

With the help of an AI algorithm, Hikvision thermography cameras recognize and ignore the heat from forklift engines to reduce unwanted alarms.




Sun Reflection


Our thermography cameras can analyze potential fire points. In the case of overexposure, the alarm will be filtered out.



Industrial Scenarios

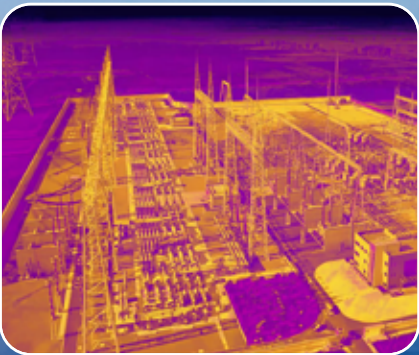


Electrical

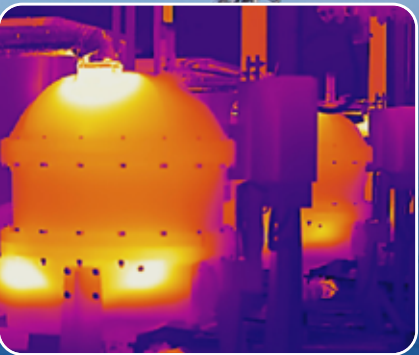

Manufacturing



Waste & Recycling

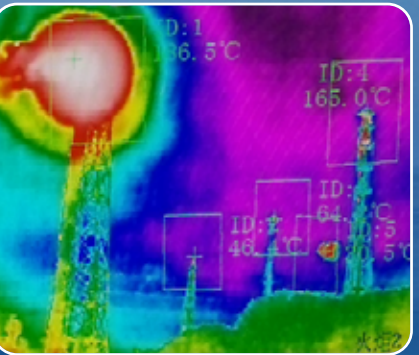

Energy

LARGE-AREA FIRE PREVENTION

Excellent for protection in natural areas, both public and private



Wide Coverage

Hikvision thermal PT cameras cover vast areas with fewer installation points for maximum cost reduction.



Stability

Since remote device replacement is difficult, Hikvision products are designed for maximum stability and durability.



Accuracy

Our solution boosts low false alarm rates and timely, accurate detections to reduce potential losses.



Timeliness

Our solution provides 24/7 monitoring and detects fires as early as possible, deploying patrol routes to shorten intervals.

Thermal Channel: Fire Source Detection

Thermal fire source detection algorithms locate suspicious heat sources. They compare temperatures between a target and environment to detect differences against the set threshold.

Optical Channel: Smoke Detection

Optical lenses in PTZ cameras deliver smoke detection as a supplement to thermal fire-source detection. Since smoke comes before fire, and fire may be covered by leaves or terrain, the smoke detection algorithm helps to locate hazards early.



National Forests



High-Value Plantations



Wildlife Parks




Large Resorts



THE BASICS OF THERMAL CAMERAS

Each type of radiation has a unique wavelength. Any object with a temperature above absolute zero can emit a detectable amount of infrared radiation. The higher an object's temperature, the more infrared radiation is emitted.

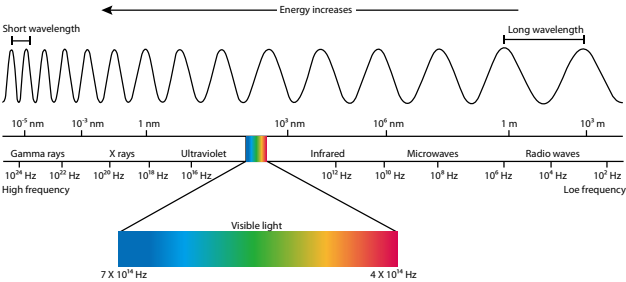


While invisible to human eyes, thermal cameras detect this kind of radiation (from wavelength 8 to 14 μm, or 8,000 – 14,000 nm) and produce images using temperature differences, making it possible to see the environment without visible light.

An infrared camera's effective range is what is meant by "seeing an object". Defined thresholds, known as Johnson's Criteria, refer to the minimum number of pixels necessary to either detect, recognize, or identify targets captured by scene imagers. The lower limits of detection, recognition, and identification (DRI), according to Johnson criteria are:



Detection: In order to distinguish an object from the background, the image must be covered by 1.5 or more pixels.

Recognition: In order to classify the object (animal, human, vehicle, boat, etc.), the image must have at least 6 pixels across its critical dimension.

Identification: In order to identify the object and describe it in details, the critical dimension must be at least 12 pixels across.

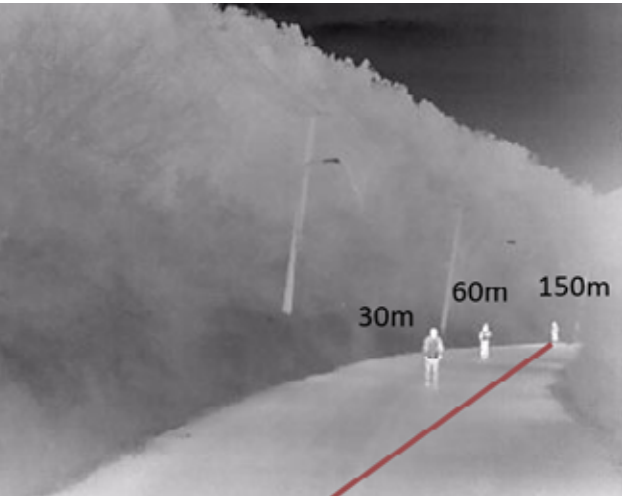

Detection, recognition and identification distances (with 8 mm lens)

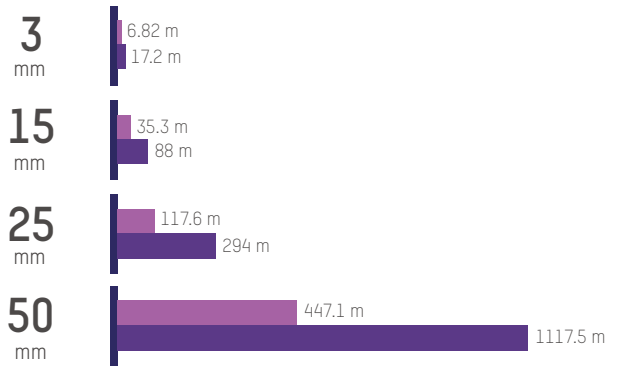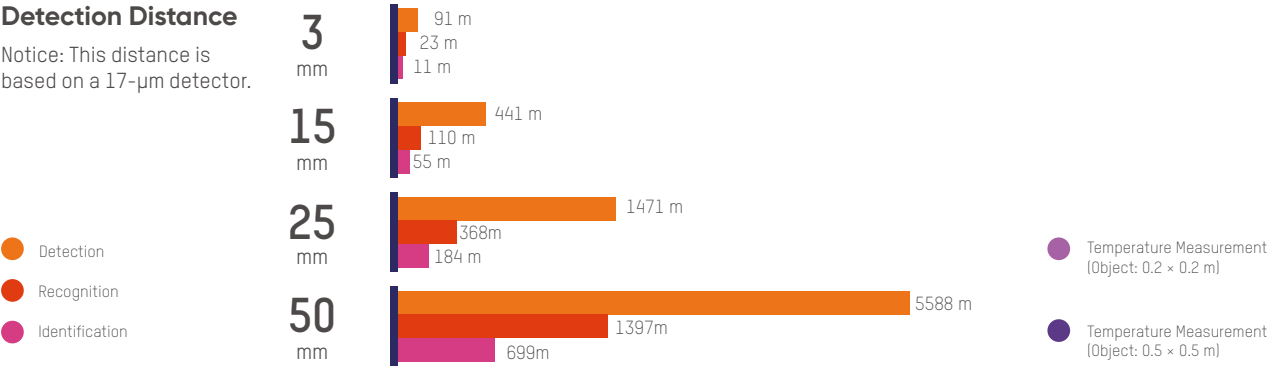

WHY DO WE USE THERMOGRAPHY CAMERAS FOR TEMPERATURE MEASUREMENT?

Hikvision thermography cameras have been widely used in detecting temperature anomalies before a fire starts, finding hot spots and invisible defects on machinery or electrical systems that could indicate a potential problem. These cameras are also used for surveying areas that are hard to reach with conventional measurement tools.

Detect Fire Risks Right Away



Hikvision thermography cameras can efficiently identify temperature anomalies with visualized images. When the surface temperature of an object is abnormal, the camera will immediately trigger the alarm for fast and accurate troubleshooting.

Real-Time Warnings




Identifies temperature anomalies within a few seconds to help protect your property.

Non-Contact Inspection



Prevents damage to facilities and operations while providing continuous monitoring.


Get Accurate Temperatures Instantly

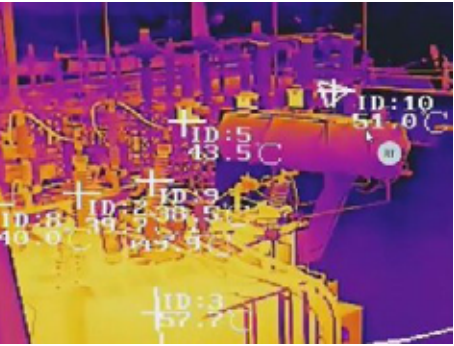

Through strict calibration and standardized testing procedures, Hikvision has established a temperature measurement model that offers high accuracy up to ±2 °C or ±2% (whichever is greater), along with a wide range from 20 to 550° C (-4° F to 1,022° F).

Flexible measurement rules help create more sensing methods.

Visualized Image

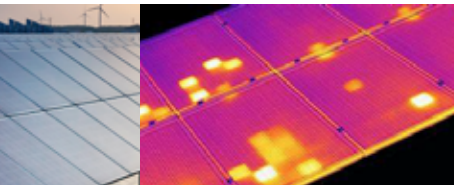

Presents heating distribution clearly to visualize fire locations easily.

PRODUCT MODELS

DS-2TD2628T/QA

Thermographic Network
Bullet Camera



Thermal: 256 x 192, 12 µm, Optical: 2688 x 1520
Lens (Thermal): 3 / 7 mm
Lens (Optical): 4 / 6 mm
FOV (Thermal): 3 mm: 50.0 x 37.3°; 7 mm: 24.9 x 18.7°
Audible Alert and Strobe Light
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: 2 ch. of inputs (0-5 VDC)
Alarm Output: 2 ch., of relay outputs (alarm response actions configurable)
Operating Temperature: -40 to 65°C (-40 to 149°F)
IP67, IK10

DS-2TD1228T/QA(B)

Thermographic Network
Turret Camera



Thermal: 256 x 192, 12 µm, Optical: 2688 x 1520
Lens (Thermal): 2 / 3 mm
Lens (Optical): 2 / 4 mm
FOV (Thermal): 2 mm: 90.0 x 65.4°; 3 mm: 50.0 x 37.3°
Audible Alert and Strobe Light
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
No Alarm Input
Alarm Output: 2 ch., of relay outputs (alarm response actions configurable)
Operating Temperature: -40 to 65°C (-40 to 149°F)
IP66

HM-TD3028T/Q(B)

Thermographic Network
Cube Camera



Thermal: 256 x 192, 12 µm, Optical: 2688 x 1520
Lens (Thermal): 2 / 3 mm
Lens (Optical): 1.4 mm
FOV (Thermal): 2 mm: 90.0 x 64.2°; 3 mm: 50.0 x 37.2°
Smart white light supplement
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
No Alarm Input
Alarm Output: 2 ch., of relay outputs (alarm response actions configurable)
Operating Temperature: -20 to 60°C (-4 to 140°F)
IP67

HM-TD2037T/X

Thermographic Network
Automation Camera



Thermal: 384 x 288, 17 µm
Lens (Thermal): 4 / 7 / 10 / 15 / 25 mm
FOV: 4 mm: 90 x 65.2°; 7 mm: 60 x 44.1°; 10 mm: 37.5 x 28.5°; 15 mm: 24.3 x 18.4°; 25 mm: 14.8 x 11.2°
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: 1 ch. of input (0-3.3 VDC)
Alarm Output: 1 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -20 to 50°C (-40 to 149°F)
IP40

HM-TD2638T/G0/T1Y

Thermographic Network
Bullet Camera



Thermal: 384 x 288, 12 µm, Optical: 2688 x 1520
Lens: 4 / 8 / 10 mm
FOV: 4 mm: : 60.2 x 45°; 8 mm: 35 x 26.1°; 15 mm: 26.5 x 19.8°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 650°C (-4 to +1,202°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: 2 ch. of inputs (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Built-in EIS
Operating Temperature: -40 to 70°C (-40 to 158°F)
NEMA4X Anti-Corrosion Standard
IP67, IK10

DS-2TD2667T/P

Thermographic Network
Bullet Camera



Thermal: 640 x 512, 17 µm, Optical: 2688 x 1520
Lens: 15 mm
FOV: 15 mm: 42.5 x 33.6°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,202°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: 2 ch. of inputs (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65°C (-40 to 149°F)
IP67, IK10

HM-TD2668T/G0/T1Y

Thermographic Network
Bullet Camera



Thermal: 640 x 512, 12 µm, Optical: 2688 x 1520
Lens: 10 mm
FOV: 10 mm: 45.1 x 35.7°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 650°C (-4 to +1,202°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: 2 ch. of inputs (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Built-in EIS and TPM2.0 Encryption Module
Operating Temperature: -40 to 70°C (-40 to 158°F)
NEMA4X Anti-Corrosion Standard
IP67, IK10

HM-TD2067T/X

Thermographic Network
Automation Camera



Thermal: 640 x 512, 17 µm
Lens (Thermal): 6 / 15 / 25 mm
FOV: 6 mm: 88.5 x 73.2°; 15 mm: 41.9 x 33.4°; 25 mm: 24.5 x 19.7°
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: 1 ch. of input (0-3.3 VDC)
Alarm Output: 1 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -20 to 50°C (-40 to 149°F)
IP40

DS-2TD2137T/QY

Thermographic Network
Bullet Camera



Thermal: 384 x 288, 17 µm
Lens: 4 / 7 mm
FOV: 4 mm: 90 x 65.3°; 7 mm: 60 x 44.1°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°C)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: 2 ch. of inputs (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65°C (-40 to 149°F)
NEMA4X Anti-corrosion standard
IP67, IK10

DS-2TD2167T/P

Thermographic Network
Bullet Camera



Thermal: 640 x 512, 17 µm
Lens: 7 mm
FOV: 7 mm: 88.5 x 73.2°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: 2 ch. of inputs (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65°C (-40 to 149°F)
IP67, IK10

HM-TD2168T/G0/T1Y

Thermographic Network
Bullet Camera



Thermal: 640 x 512, 12 µm
Lens: 5 mm
FOV: 90 x 70.1°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 650°C (-4 to +1,202°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: 2 ch. of inputs (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Built-in EIS and TPM2.0 Encryption Module
Operating Temperature: -40 to 70°C (-40 to 158°F)
NEMA4X Anti-Corrosion Standard
IP67, IK10

DS-2TD2637T/QY

Thermographic Network
Bullet Camera



Thermal: 384 x 288, 17 µm, Optical: 2688 x 1520
Lens: 7 / 10 / 15 mm
FOV: 7 mm: : 60 x 44.1°; 10 mm: 37.5 x 28.5°; 15 mm: 24.5 x 18.5°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: 2 ch. of inputs (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65°C (-40 to 149°F)
NEMA4X Anti-corrosion standard
IP67, IK10

DS-2TD4228T/S2

Network Bi-Spectrum
Speed Dome



Thermal: 256 x 192, 12 µm, Optical: 2688 x 1520
Thermal (Lens): 7/10 mm; Optical: 4.8-153 mm, 32X
FOV: 7 mm: 25 x 18.8° 10 mm: 18.1 x 13.6°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: Up to 7 ch. of input (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -30 to 65°C (-22 to 149°F)
IP66

DS-2TD4137T/W(B)

Network Bi-Spectrum
Speed Dome



Thermal: 384 x 288, 17 µm, Optical: 2688 x 1520
Thermal (Lens): 9 / 25mm; Optical: 6-240 mm
FOV: 9 mm: 37.9 x 28.7 °; 25 mm: 14.9 x 11.2 °, VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: Up to 7 ch. of input (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65°C (-40 to 149°F)
IP66, Smart Wiper

HM-TD4137T/WY

Network Bi-Spectrum
Speed Dome



Thermal: 384 x 288, 17 µm, Optical: 2688 x 1520
Thermal (Lens): 9 / 25 / 50 mm; Optical: 6-240 mm
FOV: 9 mm: 37.9 x 28.7 °; 25 mm: 14.9 x 11.2°, 50 mm: 7.5 x 5.6°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: Up to 7 ch. of input (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65°C (-40 to 149°F)
IP66, smart Wiper, NEMA 4X Anti-Corrosion Housing

DS-2TD4167T/W(B)

Network Bi-Spectrum
Speed Dome



Thermal: 640 x 512, 17 µm, Optical: 2688 x 1520
Thermal (Lens): 9 / 25 mm; Optical: 6-240 mm
FOV: 9 mm: 72.0 x 56.1°; 25 mm: 24.5 x 19.7°; VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: Up to 7 ch. of input (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65°C (-40 to 149°F)
IP66, Smart Wiper

HM-TD4167T/WY

Network Bi-Spectrum
Speed Dome



Thermal: 640 x 512, 17 µm, Optical: 2688 x 1520
Thermal (Lens): 9 / 25 mm; Optical: 6-240 mm
FOV: 9 mm: 72.0 x 56.1°; 25 mm: 24.5 x 19.7°; VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%) Alarm Input: Up to 7 ch. of input (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65°C (-40 to 149°F)
IP66, Smart Wiper, NEMA 4X Anti-Corrosion Housing

HM-TD5528T/W

Network Bi-Spectrum
Mini PTZ Camera



Thermal: 256 x 192, 12 µm, Optical: 2688 x 1520
Thermal (Lens): 10 / 15 mm, Optical: 4MP, 4.8-153 mm
FOV: 10 mm: 17.5 x 13.1°; 15 mm: 11.7 x 8.8°; VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%) Alarm Input: 2 ch. of input (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 70°C (-40 to 158°F)
IP67

HM-TD5537T/W

Network Bi-Spectrum
Mini PTZ Camera



Thermal: 384 x 288, 17 µm, Optical: 2688 x 1520
Thermal: 7 / 15 / 25 mm, Optical: 4MP, 4.8-153 mm
FOV: 7 mm: 54.8 x 42.5°; 15 mm: 24.55 x 18.54°; 25 mm: 14.9 x 11.2°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550 °C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: 2 ch. of input (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 70 °C (-40 to 158°F)
IP67

DS-2TD8167/WY

Network Bi-Spectrum
Positioning System



Thermal : 640 × 512, 17 µm; Optical : 4: 2688 × 1520 2: 1920 × 1080
Thermal Lens: 150 / 190 / 230 mm
Optical Lens: C (6-336 mm) / E (10-780mm) / G (16.7-1000 mm)
FOV: 150 mm: 4.15 × 3.32°; 190 mm: 3.46 × 2.77°; 230 mm: 2.83 × 2.27°
VCA: Line crossing / Intrusion / Region entrance / Region exiting/ Temperature exception
Temperature Exception Range : -20 to 150°C (-4 to +302°F)
Temperature Accuracy : ±8°C (±14.4°F)
Working Temperature : -40 to 65°C (-40 to 149°F)
Anti-Corrosion Coating (Y); Supplemental Light (L)
IP66

HM-TD8167/W

Network Bi-Spectrum
Positioning System



Thermal : 640 × 512, 17 µm; Optical : 4: 2688 × 1520; 2: 1920 × 1080
Thermal Lens: 100 / 150 / 190 / 230 mm
Thermal Lens: C (6-336 mm) / E (10-780 mm) / G (16.7-1000 mm)
FOV: 100 mm: 6.2 × 5°; 150 mm: 4.15 × 3.32°; 190 mm: 3.46 × 2.77°; 230 mm: 2.83 × 2.27°
VCA: Line crossing / Intrusion / Region entrance / Region exiting/ Temperature exception
Temperature Exception Range : -20 to 150°C (-4 to +302°F)
Temperature Accuracy: ±8°C (±14.4°F)
Working Temperature: -40 to 65°C (-40 to 149°F)
Anti-Corrosion Coating (Y); Supplemental Light (L)
IP66

DS-2TD95C8/W

Network Bi-Spectrum
Sphere PTZ



Thermal : 1280 × 1024, 12 µm; Optical 4: 2688 × 1520 2: 1920 × 1080
Thermal Lens: 150 / 190 / 300 mm
Optical Lens: 2 MP, 10-1000 mm/4 MP, 10-800 mm
FOV:150 mm: 5.9 × 4.7°; 190 mm: 4.6 × 3.7°; 300 mm: 2.9 × 2.4°
VCA: Line crossing / Intrusion / Region entrance / Region exiting / Ship detection
Fire detection distance up to 12.5 km
Smoke detection distance up to 16 km
Working Temperature : -40 to 70°C (-40 to 158°F)
IP67, NEMA 4X

HM-TD95C8/W

Network Bi-Spectrum
Sphere PTZ



Thermal: 1280 × 1024, 12 µm; Optical: 2688 × 1520
Thermal Lens: 150 / 190 / 300 mm
Optical Lens: 10-800 mm
FOV:150 mm: 5.9 × 4.7°; 190 mm: 4.6 × 3.7°; 300 mm: 2.9 × 2.4°
VCA: Line crossing / Intrusion / Region entrance / Region exiting / Ship detection
Fire detection distance up to 12.5 km
Smoke detection distance up to 12 km
Working Temperature: -40 to 70°C (-40 to 158°F)
IP67, NEMA 4X

HM-TD5567T/W

Network Bi-Spectrum Mini
PTZ Camera



Thermal: 640 x 512, 17 µm, Optical: 2688 x 1520
Thermal: 7 / 15 / 25 mm; Optical: 4MP, 4.8-153 mm
FOV: 7 mm: 88.5 x 73.2°; 15 mm: 41.7x 33.3°; 25 mm: 24.9 x 20°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550 °C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: Up to 2 ch. of input (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 70°C (-40 to 158°F)
IP67

DS-2TD6237T/W

Network Bi-Spectrum
Positioning System



Thermal: 384 x 288, 17 µm, Optical: 2688 x 1520
Thermal: 25 / 50 mm; Optical: 4MP, 6-240 mm
FOV: 25 mm: 14.88 x 11.19°; 50mm: 7.47 x 5.61°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: Up to 7 ch. of input (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65°C (-40 to 149°F)
IP66

DS-2TD6267T/W

Network Bi-Spectrum
Positioning System



Thermal: 640 x 512, 17 µm, Optical: 2688 x 1520
Thermal: 25 / 50 mm; Optical: 4MP, 6-240 mm
FOV: 25 mm: 24.55 x 19.75°; 50mm: 12.42 x 9.95°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550°C (-4 to +1,022°F)
Temperature Accuracy: Max (±2°C, ±2%)
Alarm Input: Up to 7 ch. of input (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65°C (-40 to 149°F)
IP66

DS-2TD2528T/Q(C)

Thermography
Explosion-proof Bullet



Thermal : 256 × 192, 12 µm; Optical : 2688 × 1520
Thermal Lens : 3 / 7 / 10 mm; Optical Lens: 3.3 / 4 / 8 mm
FOV: 3 mm: / 7 mm: / 10 mm: 50.0° × 37.3°/ 24.9° × 18.7° / 18° × 13.5°
Temperature Exception Range : -20 to 650°C (-4 to 1,202°F)
Temperature Accuracy: Max (± 2°C, ± 2%)
Working Temperature: -40 to 60°C (-40 to 140°F), IP68
Standard, ATEX, IECEx
IP68, NEMA 4X

DS-2TD2537T/Q(C)

Thermography
Explosion-proof Bullet



Thermal : 384 × 288, 17 µm; Optical : 2688 × 1520
Thermal Lens: 4 / 10 / 15 mm; Optical Lens: 2 / 4 mm
FOV: 4 mm: / 10 mm: / 15 mm: 90.0 × 65.4° / 37.9 × 28.7° / 24.2 × 18.4°
Temperature Exception Range : -20 to 650°C (-4 to 1,202°F)
Temperature Accuracy: Max (± 2°C, ± 2%)
Working Temperature: -40 to 60°C (-40 to 140°F)
IP68 Standard, ATEX, IECEx

DS-2TD2568T/G0/T1Y

Thermography
Explosion-proof Bullet



Thermal: 640 × 512, 12 µm; Optical: 2688 × 1520
Thermal: 5/ 15 mm; Optical: 2.3 / 6.4 mm
FOV: 5 mm / 15 mm: 90.0 × 67.2° / 29.7 × 23.6°
Temperature Exception Range: -20 to 650°C (-4 to 1,202°F)
Temperature Accuracy: Max (± 2°C, ± 2%)
Working Temperature: -40 to 60°C (-40 to 140°F)
Built in EIS and TPM2.0 Encryption Module
IP68 Standard, ATEX, IECEx


DS-2TD6567T-H4LX/W

Thermography
Explosion-proof
Positioning System




Thermal : 640×512, 17 µm, Optical : 2688 × 1520
Lens (thermal): 25/ 50 mm
Lens (optical): 6-240mm, 40X
FOV: 25 mm: 24.9°×20°/ 50 mm: 12.4°×10° (H × V)
Temperature Exception Range: -20 to 550°C (-4 to 1,022°F)
Temperature Accuracy: Max (± 2°C, ± 2%)
Alarm Input: Up to 7 ch. of input (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Working Temperature: -40 to 60°C (-40 to 140°F)
IP68 Standard, ATEX, IECEx

Effective Coverage
Small & Medium Area Fire Prevention

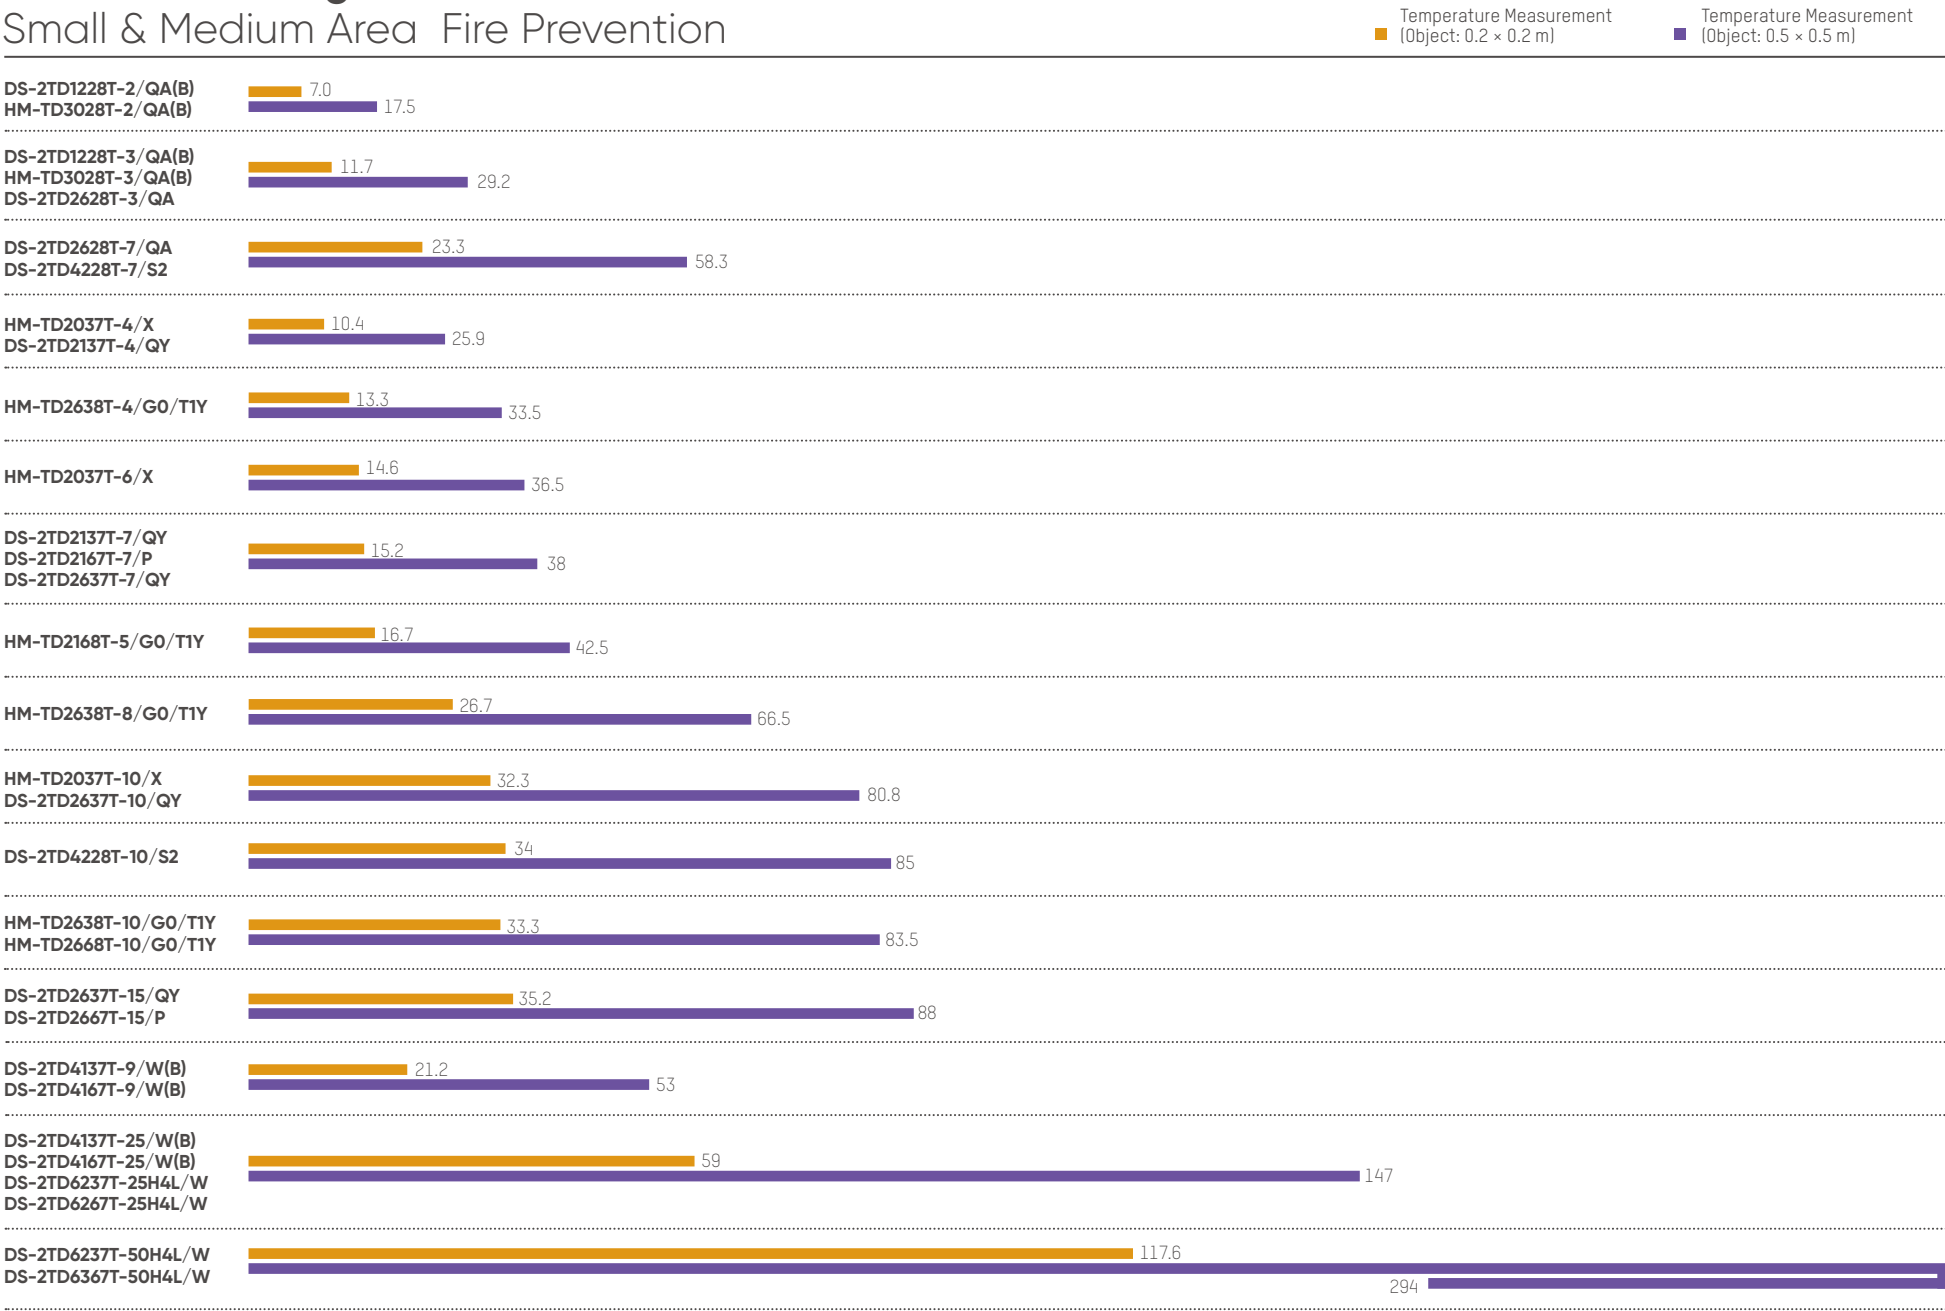

Effective Coverage
Large Area Fire Prevention

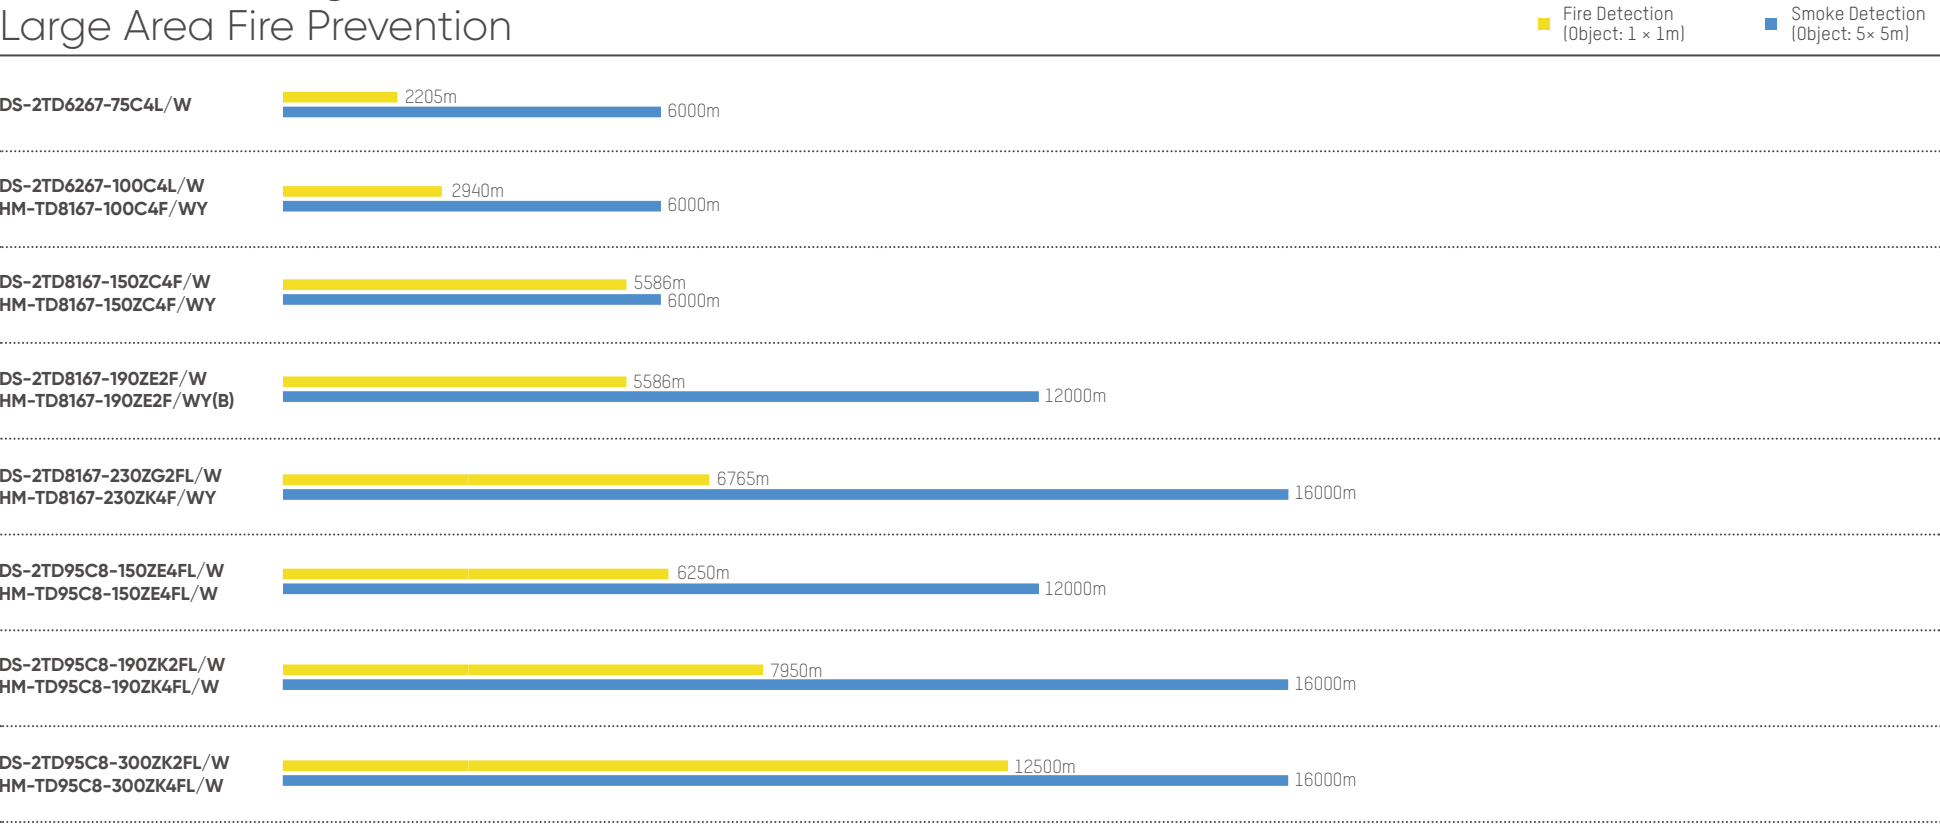



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
Business: overseasbusiness@hikvision.com
Technical Support: support@hikvision.com

Hikvision Australia T +61-2-8599-4233 salesau@hikvision.com	Hikvision Azerbaijan T +994 50 369 81 57 Azerbaijan.CATC@hikvision.com	Hikvision Brazil T +55-11-3318-0050 Latam.support@hikvision.com	Hikvision Canada T +1-866-200-6690 sales.canada@hikvision.com	Hikvision Colombia sales.colombia@hikvision.com	Hikvision Czech T +420 29 6182640 info.cz@hikvision.com	Hikvision Egypt T +20223066117 sales.eg@hikvision.com
Hikvision Europe T +31 23 5542770 sales.eu@hikvision.com	Hikvision France T +33(0)1 85 330 450 info.fr@hikvision.com	Hikvision Germany sales.dach@hikvision.com	Hikvision Hong Kong , China sales.hk@hikvision.com	Hikvision Hungary KFT info.hu@hikvision.com	Hikvision India T +91-22-6855 9944 sales@pramahikvision.com	Hikvision Indonesia T +6221 2933 9366 Sales.Indonesia@hikvision.com
Hikvision Israel T +972 79 5555590 sales.israel@hikvision.com	Hikvision Italy T +39 0438 6902 info.it@hikvision.com	Hikvision Kazakhstan T +7 (727) 291-75-88 support@hikvision.kz	Hikvision Kenya wangchengbin@hikvision.com	Hikvision Korea T +82-1661-8138 sales.korea@hikvision.com	Hikvision Malaysia T +60327224000 sales.my@hikvision.com	Hikvision Mexico T +52 55 2624 0110 sales.mexico@hikvision.com
Hikvision New Zealand T 09 217 3127 salesnz@hikvision.com	Hikvision New Panama Sales.centralamerica @hikvision.com	Hikvision Pakistan T +92-2135147526 support.pk@hikvision.com	Hikvision Philippines support.ph@hikvision.com	Hikvision Poland T +48 22 460 01 50 info.pl@hikvision.com	Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com	Hikvision Romania marketing.ro@hikvision.com
Hikvision Singapore T +65 6684 4718 sg@hikvision.com	Hikvision South Africa T +27 877018113 sale.africa@hikvision.com	Hikvision Spain T +34 91 737 16 55 info.es@hikvision.com	Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru	Hikvision Thailand sales.thailand@hikvision.com	Hikvision Turkey T +90 216 521 70 70 support.tr@hikvision.com	Hikvision UAE T +971-4-4432090 salesme@hikvision.com
Hikvision UK & Ireland T +44(0)1628 902 140 info.uk@hikvision.com	Hikvision Uzbekistan T +998-71-233-55-50 uzbekistan@hikvision.com	Hikvision USA T +1-909-895-0400 sales.usa@hikvision.com	Hikvision Vietnam T +84 24 7300 7586 sale.vn@hikvision.com			