

J-SAP-HK8010 Manual Call Point



The manual call point is a field component in the fire alarm system. The device is installed in a public place, when a fire occurs, the manual manually press the starting part to trigger the fire alarm signal.

- Nonpolarity two bus, convenient for construction wiring, avoiding equipment failures caused by incorrect connections.
- Using resettable operating panel, reset by special key.
- Each mounting base contains a reset key, which can be used on demand.
- Includes telephone jack function and call status indicator.


▪ Specification

Model		J-SAP-HK8010
General	Weight	96g
	Main Power Supply	DC 24 V (DC 18 V~DC 28 V)
	Indicator	2 Red, 1 for Fire Alarm, 1 for Phone
	Coding Parameter	1~250
	Wiring	Two-wire, polarity-free
	reset mode	Special key manual reset
	Monitor Current	$\leq 150 \mu\text{A}$
	Alarm Current	$\leq 0.3 \text{ mA}$
	Product Dimension	L 86 mm * W 86 mm * H 34 mm (with base)
	Alarm Mode	Manually press the starting part
Bus Parameters	Wiring requirements	RVS 2*1.5mm ² Flame Retardant Wire, Max distance: 1000 m

▪ Available Model

Manual Call Point-J-SAP-HK8010

▪ Dimension

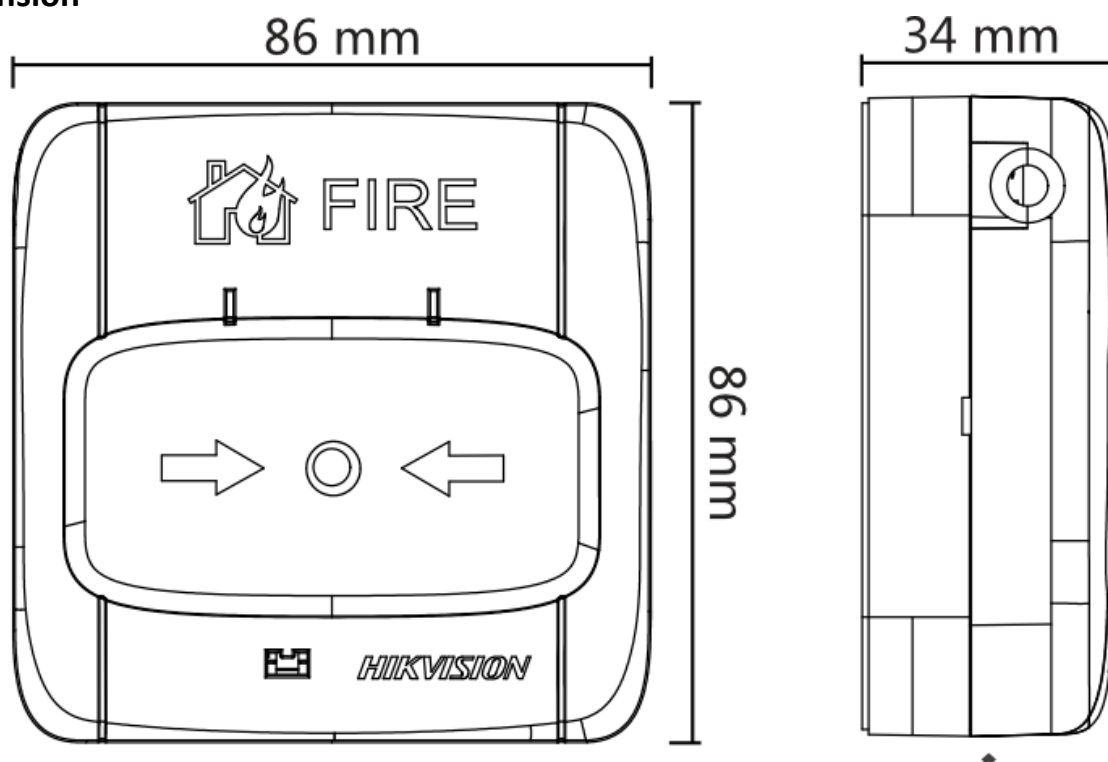

Safer Place Better Life

Headquarters

Address: Room 311, Unit B, Building 2, No.399,
Danfeng Road, Binjiang District, Hangzhou City,
Zhejiang Province, China
Tel: 0086 400-800-5998
www.hikvision.com