

JB-LBZ2-HK8308 Fire Alarm Control Panel



The new generation of fire alarm control linkage equipment can receive and send out fire alarm signals and fault signals, complete the corresponding display and linkage control functions, and support the alarm and fault information transmission to the monitoring center and all kinds of integrated security platform system of our company.

Products are rich in physical form, divided into floor cabinet type fire alarm controller, piano type fire alarm controller, with strong function, high performance, high reliability, flexible configuration, easy installation and use, etc., suitable for large building groups.

- Reliability design, system self-diagnosis, self-error correction, self-recovery function to ensure system reliability.
- Color LCD display, 1024*600 display resolution, humanized interactive design.
- Strong EMC and safety design, stronger static electricity, surge, electrical rapid pulse, radiation immunity, anti-lightning protection ability.
- CAN isolation design, stronger anti-interference performance, more stable system.
- Built-in full keyboard Chinese input method, can describe the location information of each device in detail, easy to locate the fire.
- Support access to HCP, through the platform unified visual management, receive fire alarm situation.
- The built-in micro thermal printer can print all kinds of information of the system in real time.
- It has a USB interface and can be connected to an external U disk, which provides more convenient on-site operation for debugging and maintenance.
- The active/standby power management system ensures high power efficiency.
- With CAN, RS-485, 100 Mbit network, USB and other data communication interface, to achieve a variety of protocol interaction functions.

▪ Specification

Application Scene	
Mount Type	Wall Mounting
General	
Main Power Supply	AC 220 V, 50 Hz
Stand-by Power Supply	2 * DC 12 V/17 Ah lead-acid batteries
Product Dimension	L 510 mm × W 160 mm × H 810 mm
Key Feature	
Capacity	8 Loop/Max.
Typical temperature range	0~40 °C

▪ Available Model

JB-LBZ2-HK8308/3

JB-LBZ2-HK8308/1

JB-LBZ2-HK8308/2

JB-LBZ2-HK8308/4


JB-LBZ2-HK8308/5

JB-LBZ2-HK8308/6

JB-LBZ2-HK8308/7

JB-LBZ2-HK8308/8

▪ Dimension

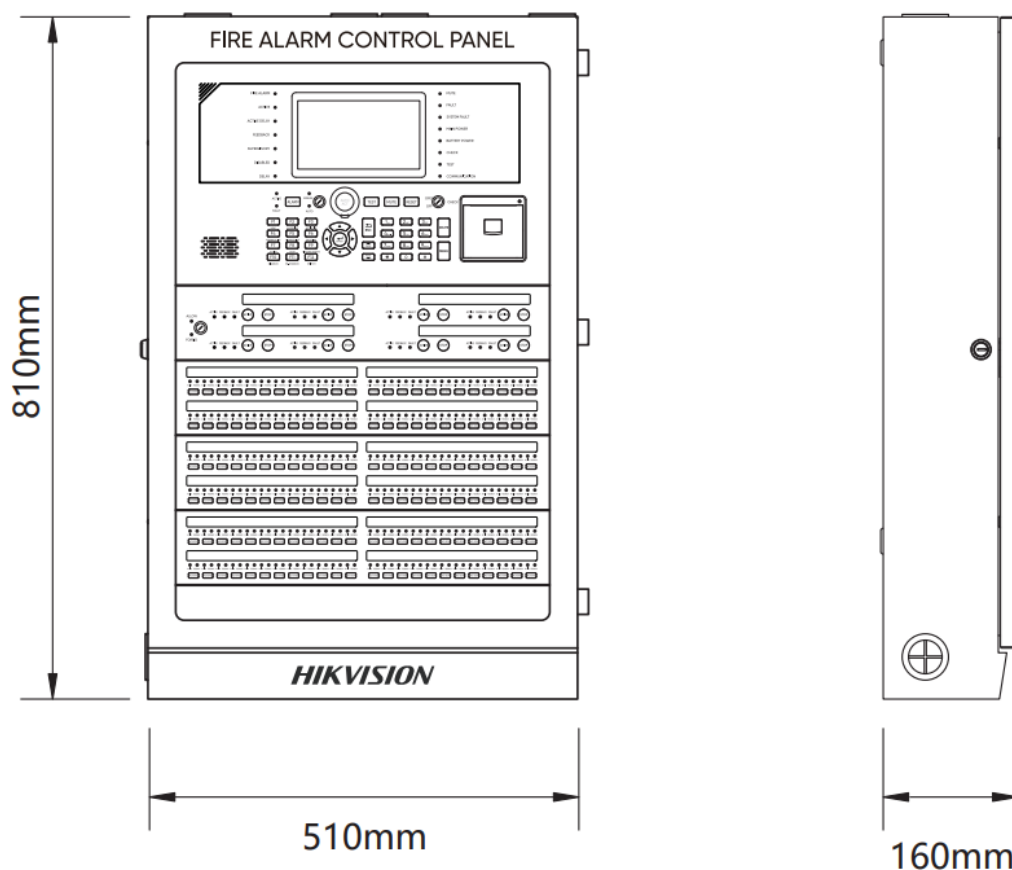

Headquarte
 Address: Roc
 Danfeng Roa
 Zhejiang Pro...
 Tel: 0086 400-800-5998
 www.hikvision.com

▪ Accessory

▪ **Optional**

**MS17-12
Maintenance-Free
Sealed Lead Acid
Battery**



Safer Place Better Life

Headquarters

Address: Room 311, Unit B, Building 2, No.399,
Danfeng Road, Binjiang District, Hangzhou City,
Zhejiang Province, China
Tel: 0086 400-800-5998
www.hikvision.com