

ISD-SG6040D-2CVL

Dual-View and Dual-Energy X-ray Intelligent Security Inspection System

The ISD-SG6040D-2CVL X-ray intelligent inspection system which combines functions such as intelligent recognition, package-package linkage, various speed etc. better solve more problems such as under-detection caused by low security inspector concentration, and excessive stress during peak security check. The product is applicable to application scenarios such as airport, customs, railway, metro, prison, government office, commercial building, hotel, embassy, sports, culture events etc. It is applicable for security inspection of satchels, parcels, express wares, hand baggage and small-sized packages.



- **Material Classification:** Advanced material discrimination technology is used to recognize the equivalent number of the test object and assign different colors (3 or 6 colors).
- **Intelligent Recognition:** Integrated with self-developed IPR deep learning recognition and X-ray imaging algorithm, better improving the recognition.
- **Variable Speed:** One-click switch the speed according to usage scenario.
- **Networking:** Connect the HCP over network to manage the data for security inspection business.
- **Event Traceback:** Review the video that links with X-ray image to playback the situation at that time.
- **Quick Login:** Supports fingerprint and password, user can login in the device by any of two methods.
- **Audible and Visual Indicator:** Clearly warn the operators when the prohibited articles are detected.
- **Data Storage:** Supports storing and reviewing video, images, and alarm information locally of security inspection system.
- **Package-Package Correlation:** Link the X-ray image of the baggage with the picture of the tunnel camera.
- **Video-Package Correlation:** Link the X-ray image of the baggage with the video of the cameras.

▪ Specification

▪ Size	
Tunnel Size	620 mm(W) × 420 mm(H)
Dimension	2311 mm(L) × 1172 mm(W) × 1260 mm(H)
Operation Desk Size	1200 mm(L) × 700 mm(W) × 1200 mm(H)
▪ Performance	
Line Resolution ^[1]	38 AWG standard, 40 AWG typical
Penetration ^[1] (Steel)	32 mm standard, 36 mm typical
Spatial Resolution	Typical 2.0 mm from both angles
Simple Penetration – Thin Materials	Steel sheets with thicknesses of 0.15, 0.10, and 0.05 mm visible
▪ X-ray Generator	
X-ray Generators	2
Anode Voltage / Current	Bottom View: 160kV / 1.0mA (Adjustable) Side View: 140kV / 1.0mA (Adjustable)
Cooling / Working cycle	Oil-cooling / Continuous
Orientation	Vertically downward & Horizontal
Detector	L-shaped
▪ Radiation	
External Dose Rate ^[2]	< 1.0 μSv/h (100mm away from the device surface)
Film Safety	Standard of ASA / ISO1600
▪ Conveyor	
Height	600 mm
Speed	0.2 m/s, 0.3 m/s, 0.4 m/s adjustable
Load	165Kg
▪ Monitoring System	
Sensor Type	1/2.8" Progressive Scan CMOS
Cameras	3-ch
Video Compression Standard	H.265 / H.264 / MJPEG
Max. Resolution	1920 × 1080
Video Storage Capability	More than 30 days
▪ Display	
Screen Size	21.5", Dual-screen
Resolution	1920 × 1080
▪ Intelligent Functions	
Prohibited Goods	35 categories with 64 types
Login Method	Fingerprint / Password
▪ System Functions	
Standard	Time / Date, baggage counting, user management, log management, X-ray on time, power on self-test, bi-directional scanning, enhanced scanning, system information management, built-in system diagnostics, standby mode, training, HCP, organic materials alarm, non-penetration alarm, TIP, English/Turkish Menu, etc.
TIP	consist of at least 1,000 virtual images, including images of at least 250 different threat items
Startup Time	Max. of 2 minutes
PC	CPU: 4*Cortex A73+4*Cortex A55, Max. 2.4GHz GPU: Mali-G610 4*256KB L2Cache RAM: 8GB DDR4 HDD: 4TB
▪ Image Process Functions	
Image Enhancement	Color / Black & White(C/B&W), Organic stripping(ORG-), Inorganic stripping(INORG-), Negative, High / Low penetration(H/L), Absorptivity increase(ABS+), Absorptivity decrease(ABS-), Super Enhancement(SEN), Edge Enhancement(Edge) and Suspect materials enhancement(Z789), 64X zoom in and 3X image magnifier, etc.

Material Classification	3 Colors mode (Default) 6 Colors mode (Optional)
Image Recall	Recall infinitely.
Image Storage Capability	400,000 +
▪ Device Parameters	
Power Consumption	Max. 1.0 KW
Power Supply	AC 220V (-15% to +10%) , 50Hz/60Hz (±3Hz) AC 110V (-15% to +10%) , 50Hz/60Hz (±3Hz)
Noise Level	60dB(A), 1000 mm away from the device surface
Operating Temperature / Humidity	0 °C to 40 °C / 10 % to 95 % (non-condensing)
Storage Temperature / Humidity	-20 °C to 60 °C / 0 % to 95 % (non-condensing)
Weight	Net: approx. 800 Kg
System	IP20
Lead Curtain Unit	522*300*2.2mm 0.5mmPb, Comply with RoHS

^[1] Stated performance as measured by HIKVISION Imaging Standard Test Piece.

^[2] The X-ray leakage rate reaches the natural environment background level, well comply with USFDA requirements.


▪ Available Model

ISD-SG6040D-2CVL(220V)(set)(O-STD)


ISD-SG6040D-2CVL(110V)(set)(O-STD)

▪ Dimension

▪ X-ray security inspection system

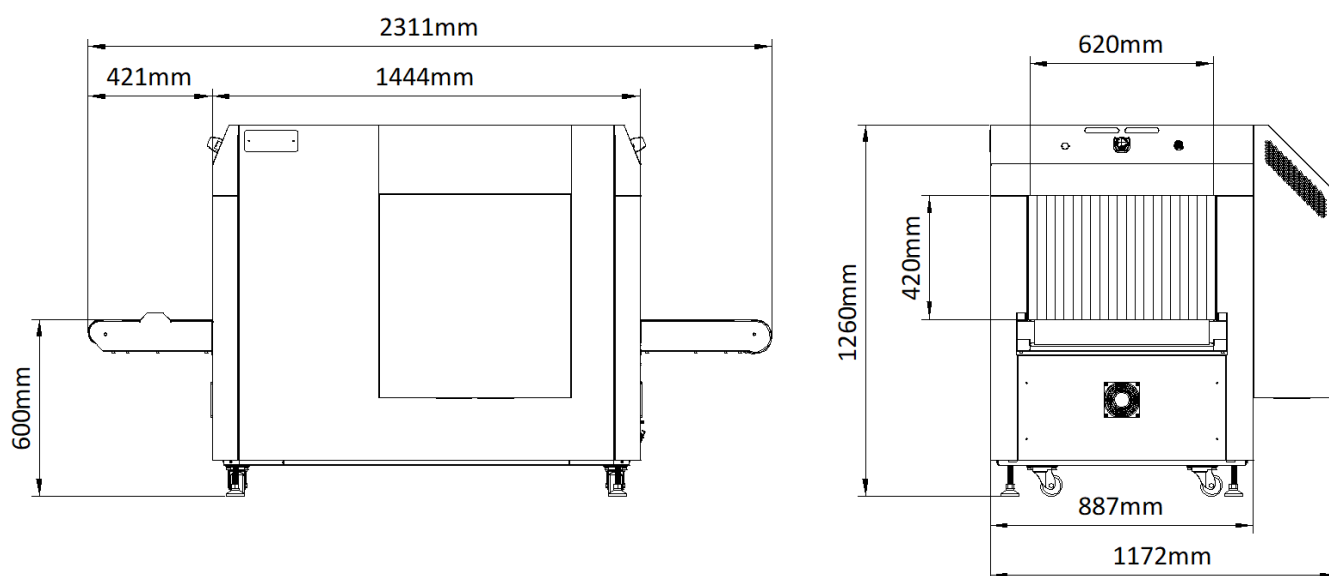

▪ Operation desk

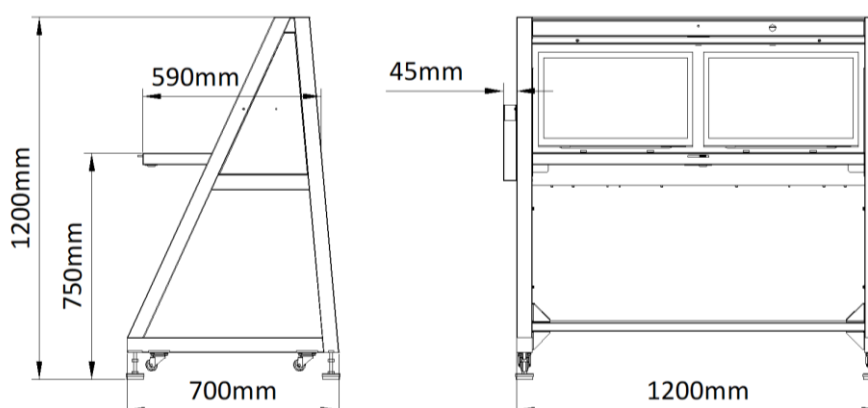

- **Accessory**
- **Optional**

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq